




## Druckrohr, Edelstahl, 1 Membran

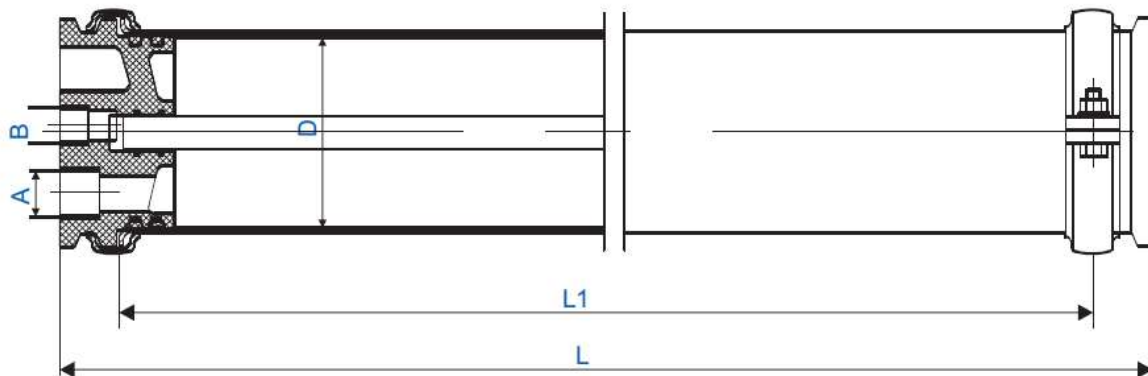

| Model   | L (mm) | L1 (mm) | D (mm) | A (in)       | B (out) |
|---------|--------|---------|--------|--------------|---------|
| PV-2514 | 417    | 363     | 62     | 3/8"         | 1/4"    |
| PV-2521 | 594    | 540     | 62     | 3/8"         | 1/4"    |
| PV-2540 | 1082   | 1024    | 62     | 3/8"         | 3/8"    |
| PV-4014 | 427    | 367     | 102    | 1/2"         | 1/2"    |
| PV-4021 | 605    | 545     | 102    | 1/2" or 3/4" | 1/2"    |
| PV-4040 | 1088   | 1028    | 102    | 1/2" or 3/4" | 1/2"    |

### Eigenschaften:

- Doppeldichtungen in den Anschlußstücken
- Max. Betriebstemperatur: 45° C
- Berstdruck: Max. 17,5 Bar

### Material:

- Edelstahl Druckrohr SUS304
- Anschlußstück: PE
- Sicherungsring: Delrin (weiß)